

DCA PROFESSIONAL
POWER TOOLS

WWW.DCATOOLS.COM



JIANGSU DONGCHENG M&E TOOLS CO.,LTD.

Authorized Dealer:



DCA



2017
POWER TOOLS CATALOGUE



CONTENTS



P04/08 **DC TOOLS**



P09/27 **AC TOOLS**



P28/30 **PNEUMATIC TOOLS**



P31/32 **MEASURING TOOLS**



P33/35 **WELDING MACHINES**



P36/37 **GENERATORS**



P38/39 **GARDEN TOOLS**

SALES NETWORK



DC TOOLS



PROFESSIONAL POWER TOOLS

CORDLESS SCREWDRIVER



4V Cable Charger

ADPL 5(TYPE C)

Battery	4V/1.5Ah
Max.Screw Dia	5(mm)
No-Load Speed	200(r/min)
Net Weight	0.35(kg)

CORDLESS SCREWDRIVER



4V Bracket Charger

ADPL 02-5(TYPE B)

Battery	4V/1.5Ah
Max.screw Dia.	5(mm)
No-load Speed	200(r/min)
Net Weight	0.35(kg)

CORDLESS PRUNER



4V

ADYD14(TYPE B)

Battery	4V/2.0Ah
Max.Cutting Diameter	Φ14New Branch(mm)
No-Load Shear Frequency	50(./min)
Net Weight	0.71(kg)

CORDLESS IMPACT DRIVER



12V

ADPL02-8(TYPE E)

Battery	12V/2.0Ahx2
No-load Speed	0-2400(RPM)
Rated Impacts	0-3000(./min)
Max.fastening Torque	100(N.M)
Net Weight	1.0(kg)

CORDLESS DRIVER DRILL



12V

ADJZ09-10(TYPE E)/ADJZ09-10(TYPE B)

Battery	12V/2.0Ahx2/12V/2.0Ahx1
Max.screw Dia	7(mm)
No-load Speed	0-700(r/min)
Max.chucking Capacity	10(mm)
Max.drilling Capacity	Steel Φ10(mm)
Wood	Φ20(mm)
Net Weight	1.0(kg)

CORDLESS ANGLE DRIVER DRILL



12V

ADJZ14-10(TYPE E)

Battery	12V/2.0Ahx2
Max.screw Dia	6.5(mm)
No-load Speed	0-800(r/min)
Max.chucking Capacity	11(mm)
Max.drilling Capacity	Steel(mm) Φ10
Wood(mm)	Φ25
Net Weight	1.0(kg)

CORDLESS DRIVER DRILL



12V

ADJZ6(TYPE B)

Battery	12V/2.0Ahx2
Max.screw Dia.	6(mm)
No-load Speed	0-700(r/min)
Max.drilling Capacity	Steel Φ6(mm)
Wood	Φ12(mm)
Max. drilling torque	15(n.m)
Net Weight	0.9(kg)

CORDLESS SCREWDRIVER



4V

ADPL 8(TYPE B)

Battery	12V/2.0Ahx2
Max.screw Dia.	6(mm)
No-load Speed	High 0-1060
Low	0-270 (r/min)
Net Weight	1.0(kg)

CORDLESS DRIVER DRILL



12V

ADJZ20-10(TYPE E)

Battery	12V/2.0Ahx2
Max.screw Dia.	10mm
No-load Speed	low 0-400(r/min)
high	0-1500(r/min)
Max.drilling Capacity	Steel Φ10(mm)
Wood	Φ20(mm)
Net Weight	1.2(kg)

CORDLESS DRIVER DRILL



12V

ADJZ10-10(TYPE E)/(TYPE B)

Battery	12V/2.0Ahx2
Max.screw Dia.	7(mm)
No-load Speed	Low 0-400(r/min)
High	0-1500
Max.drilling Capacity	Steel Φ10(mm)
Wood	Φ20(mm)
Net Weight	1.1(kg)

CORDLESS DRIVER DRILL



12V

ADJZ15-10(TYPE E)

Battery	12V/2.0Ahx2
Max.screw Dia	7(mm)
No-load Speed	0-700(r/min)
Max.chucking Capacity	10(mm)
Max.drilling Capacity	Steel Φ10(mm)
Wood	Φ20(mm)
Net Weight	1.0(kg)

CORDLESS MULTI-TOOL



12V

ADMD12(TYPE E)

Battery	12V/2.0Ahx2
Oscillation	5000-20000(./min)
Speed Shifting Gears	2-4-6-8-10-12
Oscillation Angle	3(°)
Power Display	3
Net Weight	0.95(kg)

CORDLESS DIE GRINDER



ADSJ10(TYPE E)

Battery	12V/2.0Ahx2
Rated Speed(r/min)	5000-32000
Speed Shifting Gears	1-2-3-4-5-6
Max. Grinding Wheel Dia	10(mm)
Power Display	3
Net Weight	0.61(kg)

12V

CORDLESS CAULK GUN



ADPJ12(TYPE A)

Battery	12V/2.0Ahx2
Max. Pushing force	3400(N)
Feed Speed	0-12.9(mm/s)
Stroke	213(mm)
Sealant Type	300ml
Net Weight	1.85(kg)

12V

CORDLESS CLEANER



ADXC12(TYPE B)

Battery	12V/2.0Ah
Max. Air Flow	1.2(m/min)
Air Pressure	1.8(kpa)
Continuous Use(minutes, approx)	20
Net Weight	0.9(kg)

12V

CORDLESS WORK LIGHT



ADWL12(TYPE B)/ (TYPE C)

Battery	12V/2.0Ah
Continuous Lighting Time	10 (h)
Led	16(pcs)
Lamp Adjusting Angle	110(°)
Net Weight	0.32(kg)

12V

product come without battery and charger which are sold separately (type c)

CORDLESS HAMMER DRILL



ADZC13(TYPE B)

Battery	14V/2.0Ahx2
Max.drilling Capacity	Steel Φ8(mm) Wood Φ10(mm) Concrete Φ12(mm)
Impact Frequency	0-5600 (.../min)
No-Load Speed	0-900(r/min)
Net Weight	1.3(kg)

14V

CORDLESS BLIND RIVETING GUN



Battery	12V/2.0Ahx2
Stroke	20(mm)
Capacity	Φ2.5-5.0 For All-purpose Φ6.0 For Aluminum Blind Rivet
Max. Tension	10000(N)
Net Weight	1.6(kg)

12V

CORDLESS CAULK GUN



ADPJ12(TYPE E)

Battery	12V/2.0Ahx2
Max. Pushing force	3400(N)
Feed Speed	0-12.9(mm/s)
Stroke	213/355(mm)
Sealant Type	300ml/600ml
Net Weight	1.85(kg)

12V

CORDLESS SABRE SAW



ADJF15(TYPE E)

Battery	12V/2.0Ahx2
Stroke	14.5(mm)
Max. Cutting Depth	Metal 8(mm) Wood 65(mm) Pipe Diameter Φ50
No-Load Speed	0-3000(r/min)
Net Weight	1.2(kg)

12V

CORDLESS SCREWDRIVER



ADJZ18-10

Battery	14.4V/2.0Ah X2
Max.screw Dia.	10mm
No-load Speed	low 0-350(r/min) high 0-1300(r/min)
Max.drilling Capacity	Steel Φ10(mm) Wood Φ20(mm)
Net Weight	1.3(kg)

14V

CORDLESS HAMMER DRILL



ADZC24(TYPE E)

Battery	18V/4.0Ahx2
Drilling Capacity	Steel Φ13(mm) Wood Φ28(mm) Concrete Φ24(mm)
Impact Frequency	0-5400 (.../min)
No-Load Speed	0-1200(r/min)
Net Weight	3.5(kg)

18V

CORDLESS IMPACT WRENCH



ADPB16(TYPE E)/ADPB16(TYPE F)

Battery	18V/4.0Ahx2/18V/5.0Ahx2
No-load Speed(R/min)	0-2200
Rated Impacting Frequency	0-3200(.../min)
Max.fastening Torque	230(N.m)
Net Weight	1.75(kg)

18V

CORDLESS DRIVER/HAMMER DRILL



ADJZ13 (TYPE E)

Battery	18V/4.0Ahx2
Max. Chucking Capacity	13(mm)
Max. Screw Dia.	10(mm)
Blows per minute	0-36000(BPM)
No-Load Speed	Step 1 0-400(r/min) Step 2 0-2000(r/min)
Max. Drilling Diameter	Steel 13(mm) Wood 38(mm)
Torque Setting	25+2
Max. Torque	70(N.m)
Net Weight	2.2(kg)

18V

CORDLESS IMPACT WRENCH



ADPB20(TYPE F)

Battery	18V/5.0Ahx2
Applicable Screw Dia.	M16-M20(mm)
No-load Speed	0-1700(rpm)
Max.cutting Frequency	0-2000(.../min)
Max.fastening Torque	650(N.m)
Net Weight	3.2(kg)

18V

CORDLESS BRUSHLESS IMPACT DRIVER



ADPL02-14(TYPE E)/ (TYPE F)

Battery	18v/4.0Ahx2/18v/5.0Ahx2
Clamping Capacity	6.35mm Hex
Max.screw Dia	14(mm)
torque setting	smart-loosen
No-load Speed	Low 140N.m High175N.m Low 0-2000(RPM) High 0-2400(RPM)
Rated Impacts(.../min)	Low 0-2900 High 0-3200
Net Weight	1.9(kg)

18V

CORDLESS RECIPROCATING SAW



ADJF28(TYPE B)

Battery	18V/4.0Ahx2
No-load Strokes	0-3300(.../min)
Length Of Strokes	28(mm)
Max.cutting Capacity	Steel 20(mm) Wood 250(mm) Tube Diameter 130 (mm)
Net Weight	3.4(kg)

18V

CORDLESS ANGLE GRINDER



ADSM100(TYPE E)/ADSM115(TYPE E) ADSM125(TYPE E)

Battery	18V/4.0Ahx2
Max.wheel Dia.	Φ100 Φ115 Φ125
Hole Dia.of Wheel	Φ16Φ22(mm)
Rated Speed	10000(r/min)
Spindle Thread	M10 M14
Net Weight	2.1/2.2(kg)

18V

CORDLESS IMPACT DRIVER



ADPL14(TYPE E)

Battery	18V/4.0Ahx2
No-load Speed	0-2200(rpm)
Rated Impacts	0-3200(.../min)
Max.fastening Torque	150(rpm)
Net Weight	1.75(kg)

18V

CORDLESS BRUSHLESS DRIVER HAMMER DRILL



ADJZ16(TYPE E)

Battery	18V/4.0Ahx2
Max.Chucking Capacity	16(mm)
No-load Speed	0-1200(r/min)
Max.drilling Capacity	Steel Φ16(mm) Wood Φ38(mm)
Max.fastening Torque	45(N.M)
Net Weight	2.2(kg)

18V

CORDLESS BRUSHLESS IMPACT WRENCH



ADPB18(TYP E)ADPB18(TYP F)

Battery	18V/4.0Ahx2/18V/5.0Ahx2
Applicable Screw Dia.	M12-M18(mm)
Square drive size	12.7(1/2")
Torque setting	smart-loosen
Step1	240 (N.m)
StepH	300 (N.m)
NO-LOAD SPEED	STPP L 0-2000(r/min) STPP H 0-2400(r/min)
Rated impacting frequency	STPP L 0-2900(.../min) STPP H 0-3200(.../min)
Net Weight	1.8(kg)

18V

CORDLESS BLOWER



ADQF28(TYPE B)

Battery	18V/4.0Ahx1
No-load Speed	
Step1	11000 ±14%(r/min)
Step2	15000±11%(r/min)
Step3	19000±10%(r/min)
Capacity	1.6-2.8(m³/min)
Net Weight	1.9(kg)

18V

CORDLESS HAMMER DRILL



ADZC02-24(TYPE E)

Battery	18V/4.0Ahx2
Max.drilling Capacity	Steel Φ12(mm) Wood Φ28(mm) Concrete Φ24(mm)
Impact Frequency	0-4900 (.../min)
No-Load Speed	0-1100(r/min)
Net Weight	3.1(kg)

18V

CORDLESS HEDGE TRIMMER



ADYD550

Battery	40V/5.0Ahx2
Charging Time	<45(mins/pack)
Single Battery Operation Time	>60(mins/pack)
Max.trim Range	550(mm)
Max.cutting Diameter	Φ10(mm)
No-load Speed	1200 -2200(6.../s)rpm
Angle Ofrotation	0/45/90(Left-right)(°)
Net Weight	5.4(kg)

40V





ADKIT01(TYPE A)



ADKIT04(TYPE E)



ADKIT01(TYPE E)



ADKIT05(TYPE E)



ADKIT02(TYPE A)



ADKIT06(TYPE E)



AC TOOLS

PROFESSIONAL POWER TOOLS

ANGLE GRINDER



ASM13-100

Max. Wheel Diameter(mm)	Φ100
Hole Diameter of Wheel	Φ16(mm)
Rated Power Input	820(W)
Rated Speed	13000(r/min)
Net Weight	1.5(kg)



ANGLE GRINDER



ASM04-150

Max. Wheel Diameter	Φ150(mm)
Hole Diameter of Wheel	Φ22.2(mm)
Rated Power Input	1500(W)
Rated Speed	10000(r/min)
Net Weight	2.9(kg)



ANGLE GRINDER



ASM180SH

Max. Wheel Diameter(mm)	Φ180
Hole Diameter of Wheel	Φ22(mm)
Rated Power Input	2600(W)
No-Load Speed	8400(r/min)
Net Weight	5.8(kg)



ANGLE GRINDER



ASM100A/ASM115/ASM100B

Max. Wheel Diameter	Φ100/Φ115/Φ100(mm)
Hole Diameter Of Wheel	Φ16/Φ22/Φ16(mm)
Rated Power Input	540/540/750(W)
Rated Speed	13000/11800/13000(r/min)
Net Weight	1.7(kg)



ANGLE GRINDER



ASM02-100A

Max. Wheel Diameter	Φ100(mm)
Hole Diameter Of Wheel	Φ16(mm)
Rated Power Input	570 (W)
Rated Speed	13000(r/min)
Net Weight	1.8(kg)



ANGLE GRINDER



ASM03-100A/ASM02-115

Max. Wheel Diameter	Φ100/Φ115(mm)
Hole Diameter Of Wheel	Φ16/Φ22(mm)
Rated Power Input	710 (W)
Rated Speed	13000/11800(r/min)
Net Weight	1.6(kg)



ANGLE GRINDER



ASM04-100A

Max. Wheel Diameter	Φ100(mm)
Hole Diameter Of Wheel	Φ16(mm)
Rated Power Input	560 (W)
Rated Speed	13000(r/min)
Net Weight	1.7(kg)



ANGLE GRINDER



ASM05-100B

Max. Wheel Diameter	Φ100(mm)
Hole Diameter Of Wheel	Φ16(mm)
Rated Power Input	850 (W)
Rated Speed	13000(r/min)
Net Weight	1.7(kg)



ANGLE GRINDER



ASM06-100

Max. Wheel Diameter	Φ100(mm)
Hole Diameter Of Wheel	Φ16(mm)
Rated Power Input	800 (W)
Rated Speed	9000(r/min)
Net Weight	2.0(kg)



ANGLE GRINDER



ASM08-100

Max. Wheel Diameter	Φ100(mm)
Hole Diameter Of Wheel	Φ16(mm)
Rated Power Input	800 (W)
Rated Speed	13000(r/min)
Net Weight	1.6(kg)



ANGLE GRINDER



ASM09-100/ASM05-115

Max. Wheel Diameter	Φ100/Φ115(mm)
Hole Diameter Of Wheel	Φ16/Φ22(mm)
Rated Power Input	710 (W)
Rated Speed	13000/11800(r/min)
Net Weight	1.3(kg)



ANGLE GRINDER



ASM09-100S

Max. Wheel Diameter	Φ100(mm)
Hole Diameter Of Wheel	Φ16(mm)
Rated Power Input	800 (W)
Rated Speed	12000(r/min)
Net Weight	1.6(kg)



ANGLE GRINDER



ASM10-100/ASM10-100S

Max. Wheel Diameter	Φ100(mm)
Hole Diameter Of Wheel	Φ16(mm)
Rated Power Input	1020 (W)
Rated Speed	13000(r/min)
Net Weight	2.1(kg)



ANGLE GRINDER



ASM11-100

Max. Wheel Diameter	Φ100(mm)
Hole Diameter Of Wheel	Φ16(mm)
Rated Power Input	710 (W)
Rated Speed	13000(r/min)
Net Weight	1.6(kg)



DC TOOLS

AC TOOLS

PNEUMATIC TOOLS

MEASURING TOOLS

WELDING MACHINES

GENERATORS

GARDEN TOOLS

DC TOOLS

AC TOOLS

PNEUMATIC TOOLS

MEASURING TOOLS

WELDING MACHINES

GENERATORS

GARDEN TOOLS



ANGLE GRINDER **ASM12-100**

Max. Wheel Diameter	Φ100(mm)
Hole Diameter Of Wheel	Φ16(mm)
Rated Power Input	850 (W)
Rated Speed	13000(r/min)
Net Weight	1.8(kg)



ANGLE GRINDER **ASM125A/ASM03-115**

Max. Wheel Diameter	Φ125/Φ115(mm)
Hole Diameter Of Wheel	Φ22(mm)
Rated Power Input	850 (W)
Rated Speed	11800(r/min)
Net Weight	1.8(kg)



ANGLE GRINDER **ASM02-125B/ASM06-115**

Max. Wheel Diameter	Φ125/Φ115(mm)
Hole Diameter Of Wheel	Φ22(mm)
Rated Power Input	1200 (W)
Rated Speed	11800(r/min)
Net Weight	3.0(kg)



ANGLE GRINDER **ASM03-125**

Max. Wheel Diameter	Φ125(mm)
Hole Diameter Of Wheel	Φ22(mm)
Rated Power Input	800 (W)
Rated Speed	9000(r/min)
Net Weight	2.1(kg)



ANGLE GRINDER **ASM04-125**

Max. Wheel Diameter	Φ125(mm)
Hole Diameter Of Wheel	Φ22(mm)
Rated Power Input	1020 (W)
Rated Speed	11800(r/min)
Net Weight	2.1(kg)



ANGLE GRINDER **ASM150A**

Max. Wheel Diameter	Φ150(mm)
Hole Diameter Of Wheel	Φ22(mm)
Rated Power Input	1200 (W)
Rated Speed	9000(r/min)
Net Weight	3.0(kg)



ANGLE GRINDER **ASM03-150/ASM03-150S**

Max. Wheel Diameter	Φ150(mm)
Hole Diameter Of Wheel	Φ22(mm)
Rated Power Input	1400 (W)
Rated Speed	1500-9000/9000(r/min)
Net Weight	3.3(kg)



ANGLE GRINDER **ASM180A/ASM180S**

Max. Wheel Diameter	Φ180(mm)
Hole Diameter Of Wheel	Φ22(mm)
Rated Power Input	2020/2600 (W)
Rated Speed	8300/8400(r/min)
Net Weight	5.0/5.8(kg)



ANGLE GRINDER **ASM02-180B**

Max. Wheel Diameter	Φ180(mm)
Hole Diameter Of Wheel	Φ22(mm)
Rated Power Input	2020 (W)
Rated Speed	8300(r/min)
Net Weight	6.0(kg)

Optional Function:Soft Start



ANGLE GRINDER **ASM03-180**

Max. Wheel Diameter	Φ180(mm)
Hole Diameter Of Wheel	Φ22(mm)
Rated Power Input	2200 (W)
Rated Speed	8300(r/min)
Net Weight	5.0(kg)

Optional Function:Soft Start



ANGLE GRINDER **ASM230A**

Max. Wheel Diameter	Φ230(mm)
Hole Diameter Of Wheel	Φ22(mm)
Rated Power Input	2020 (W)
Rated Speed	6600(r/min)
Net Weight	5.0(kg)

Optional Function:Soft Start



ANGLE GRINDER **ASM02-230B**

Max. Wheel Diameter	Φ230(mm)
Hole Diameter Of Wheel	Φ22(mm)
Rated Power Input	2020 (W)
Rated Speed	6600(r/min)
Net Weight	6.5(kg)

Optional Function:Soft Start



ANGLE GRINDER **ASM03-230**

Max. Wheel Diameter	Φ230(mm)
Hole Diameter Of Wheel	Φ22(mm)
Rated Power Input	2200 (W)
Rated Speed	6600(r/min)
Net Weight	5.0(kg)

Optional Function:Soft Start



ANGLE GRINDER **ASM05-180/ASM05-230**

Max. Wheel Diameter	Φ180/Φ230(mm)
Hole Diameter Of Wheel	Φ22(mm)
Rated Power Input	2800 (W)
Rated Speed	8300/6600(r/min)
Net Weight	5.0(kg)

Optional Function:Soft Start



STRAIGHT SANDER **ASS150/ASS125B**

Max. Wheel Diameter	Φ150/Φ125(mm)
Hole Diameter Of Wheel	Φ20(mm)
Rated Power Input	1020/710(W)
Rated Speed	5000/5300(r/min)
Net Weight	4.7/4.3(kg)



GRINDING POLISHER **ASN100**

Rated Power Input	1400(W)
Rated Speed	690-3800(r/min)
Wheel Size	120×100(mm)
Net Weight	4.7(kg)



DIE GRINDER **ASJ02-10**

Rated Power Input	105(W)
Rated Speed	30000(r/min)
Max. Grinding Wheel Dia.	Φ10
Net Weight	0.8(kg)



DIE GRINDER **ASJ03-10**

Rated Power Input	105(W)
Rated Speed	14000-30000(r/min)
Max. Grinding Wheel Dia.	Φ10
Net Weight	0.6(kg)



DIE GRINDER **ASJ25/ASJ25B**

Rated Power Input	240(W)
Rated Speed	26000(r/min)
Max. Grinding Wheel Dia.	Φ25
Net Weight	1.2(kg)



DIE GRINDER **ASJ02-25**

Rated Power Input	400(W)
Rated Speed	27000(r/min)
Max. Grinding Wheel Dia.	Φ25
Net Weight	1.8(kg)



DIE GRINDER **ASJ03-25**

Rated Power Input	400(W)
Rated Speed	27000(r/min)
Max. Grinding Wheel Dia.	Φ25
Net Weight	1.8(kg)



DIE GRINDER **ASJ04-25**

Rated Power Input	260(W)
Rated Speed	26700(r/min)
Max. Grinding Wheel Dia.	Φ25
Net Weight	1.3(kg)



DC TOOLS
AC TOOLS
PNEUMATIC TOOLS
MEASURING TOOLS
WELDING MACHINES
GENERATORS
GARDEN TOOLS

DC TOOLS
AC TOOLS
PNEUMATIC TOOLS
MEASURING TOOLS
WELDING MACHINES
GENERATORS
GARDEN TOOLS

DIE GRINDER ASJ05-25

Rated Power Input	550(W)
Rated Speed	9000- 26700(r/min)
Max.Grinding Wheel Dia.	Φ25
Net Weight	1.6(kg)



DIE GRINDER ASJ06-25

Rated Power Input	750(W)
Rated Speed	3800-8300(r/min)
Max.Grinding Wheel Dia.	Φ25
Net Weight	1.6(kg)



WELD JOINT BEVELLER AJB3

Rated Power Input	800(W)
No-Load Speed	9000(r/min)
Blade Size	□9.5×3.5×Φ4.2(mm)
Net Weight	2.5(kg)



WELD JOINT BEVELLER AJB02-3

Rated Power Input	800(W)
No-Load Speed	9000(r/min)
Blade Size	□9.5×3.5×Φ4.2(mm)
Net Weight	2.3(kg)



BENCH GRINDER ASE125/ASE150

Max.wheel Diameter	125x16x12.7/150x20x32(mm)
Rated Power Input	250(W)
Rated Speed	2840(r/min)
Net Weight	6.8/7.6(kg)



BENCH GRINDER ASE200/A3SE250

Max.wheel Diameter	200x20x32/250x25x32(mm)
Rated Power Input	370/500(W)
Rated Speed	2840(r/min)
Net Weight	12.9/21.5(kg)



A3SE250

ELECTRIC DRILL AJZ09-10

Rated Power Input	710(W)
No-load Speed	0- 2800(r/min)
Max. Drilling Capacity	
Steel	Φ10(mm)
Wood	Φ20(mm)
Net Weight	1.6(kg)



NEW

ELECTRIC DRILL AJZ04-10A

Rated Power Input	430(W)
No-load Speed	0- 1200(r/min)
Max. Drilling Capacity	
Steel	Φ10(mm)
Wood	Φ20(mm)
Net Weight	2.1(kg)



ELECTRIC DRILL AJZ10A

Rated Power Input	300(W)
No-load Speed	0- 3000(r/min)
Max. Drilling Capacity	
Steel	Φ10(mm)
Wood	Φ18(mm)
Net Weight	1.5(kg)



Optional: Keyless Chuck

ELECTRIC DRILL AJZ05-13

Rated Power Input	500(W)
No-load Speed	0- 2600(r/min)
Max. Drilling Capacity	
Steel	Φ13(mm)
Wood	Φ25(mm)
Net Weight	1.7(kg)



ELECTRIC DRILL AJZ05-10A

Rated Power Input	500(W)
No-load Speed	0- 2600(r/min)
Max. Drilling Capacity	
Steel	Φ10(mm)
Wood	Φ25(mm)
Net Weight	1.7(kg)



Optional: Keyless Chuck

ELECTRIC DRILL AJZ07-10

Rated Power Input	500(W)
No-load Speed	0- 1750(r/min)
Max. Drilling Capacity	
Steel	Φ10(mm)
Wood	Φ25(mm)
Net Weight	1.5(kg)



Optional: Keyless Chuck

ANGLE DRILL AJZ06-10

Rated Power Input	380(W)
No-load Speed	0- 1400(r/min)
Max. Drilling Capacity	
Steel	Φ10(mm)
Wood	Φ15(mm)
Net Weight	1.9(kg)



ELECTRIC DRILL AJZ08-10

Rated Power Input	250(W)
No-load Speed	0- 850(r/min)
Max. Drilling Capacity	
Steel	Φ10(mm)
Wood	Φ20(mm)
Net Weight	1.2(kg)



ELECTRIC DRILL AJZ13

Rated Power Input	500(W)
No-load Speed	1200(r/min)
Max. Drilling Capacity	
Steel	Φ13(mm)
Wood	Φ20(mm)
Net Weight	2.3(kg)



ELECTRIC DRILL AJZ02-13

Rated Power Input	500(W)
No-load Speed	0- 1200(r/min)
Max. Drilling Capacity	
Steel	Φ13(mm)
Wood	Φ20(mm)
Net Weight	2.4(kg)



ELECTRIC DRILL AJZ03-13B

Rated Power Input	800(W)
No-load Speed	850(r/min)
Max. Drilling Capacity	
Steel	Φ13(mm)
Wood	Φ36(mm)
Net Weight	2.9(kg)



ELECTRIC DRILL AJZ06-13

Rated Power Input	710(W)
No-load Speed	0-2800(r/min)
Max. Drilling Capacity	
Steel	Φ13(mm)
Wood	Φ20(mm)
Net Weight	1.7(kg)



ELECTRIC DRILL AJZ16A

Rated Power Input	800(W)
No-load Speed	680(r/min)
Max. Drilling Capacity	
Steel	Φ16(mm)
Wood	Φ36(mm)
Net Weight	3.2(kg)



ELECTRIC DRILL AJZ03-16A

Rated Power Input	1010(W)
No-load Speed	620(r/min)
Max. Drilling Capacity	
Steel	Φ16(mm)
Wood	Φ36(mm)
Net Weight	3.2(kg)



ELECTRIC IMPACT DRILL AZJ13

Rated Power Input	500(W)
No-Load Speed	0-1200(r/min)
Rated Impacting Frequency	0-15600(.../min)
Max.Drilling capacity	13(mm)
Net Weight	2.5(kg)



ELECTRIC IMPACT DRILL AZJ10

Rated Power Input	500(W)
No-Load Speed	0-2500(r/min)
Rated Impacting Frequency	0-37500(.../min)
Max.Drilling capacity	Steel Φ 8(mm)
	Concrete Φ10(mm)
	Wood Φ 20(mm)
Net Weight	1.6(kg)



ELECTRIC IMPACT DRILL AZJ02-13

Rated Power Input	500(W)
No-Load Speed	0-2600(r/min)
Rated Impacting Frequency	0-41600(.../min)
Max.Drilling capacity	Steel Φ 10(mm)
	Concrete Φ13(mm)
	Wood Φ 25(mm)
Net Weight	2.0(kg)



ELECTRIC IMPACT DRILL AZJ03-13

Rated Power Input	500(W)
No-Load Speed	0-1200(r/min)
Rated Impacting Frequency	0-15600(.../min)
Max.Drilling capacity	Φ 13(mm)
Net Weight	2.5(kg)



ELECTRIC IMPACT DRILL(TOOL KIT) AZJ04-13

Rated Power Input	500(W)
No-Load Speed	0-2600(r/min)
Rated Impacting Frequency	0-41600(.../min)
Max.Drilling capacity	
Steel	Φ 10(mm)
Concrete	Φ13(mm)
Wood	Φ 25(mm)



ELECTRIC IMPACT DRILL AZJ16

Rated Power Input	710(W)
No-Load Speed	0-3000(r/min)
Max.Drilling capacity	Steel Φ 13(mm)
	Concrete Φ16(mm)
	Wood Φ 30(mm)
Net Weight	2(kg)



ELECTRIC IMPACT DRILL AZJ20

Rated Power Input	720(W)
Low Speed	Highspeed
No-Load Speed	0-1150 0-2800 (r/min)
Rated Impacting Frequency	0-23000 0-56000(.../min)
Max.Drilling capacity	Low speed High speed
Steel(mm)	Φ 13 Φ8
Concrete	Φ20(mm)
Wood	Φ 40 Φ25(mm)
Net Weight	2.4(kg)



TAPPER AJS10

Rated Power Input	500(W)
No-Load Speed(r/min)	
Forward	0-580(r/min)
Backward	0-1000(r/min)
Tapping Capacity	
Cast iron,Aluminum or copper)	M4-M12(mm)
Steel	M4-M10(mm)
Net Weight	2.5(kg)



HAMMER DRILL

AZC02-20



Rated Power Input	500(W)
No-Load Speed	0-850(r/min)
Max.Drilling capacity	Φ20
Net Weight	2.9kg

Drill&Hammer

ELECTRIC ROTARY HAMMER

AZC03-26B



Rated Power Input	750(W)
No-Load Speed	500(r/min)
Rated Impacting Frequency	3200(.../min)
Max.Drilling capacity	Φ26
Net Weight	5.0kg

Hammer & Demolition

HAMMER DRILL

AZC05-26B



Rated Power Input	720(W)
No-Load Speed	0-1200(r/min)
Rated Impacting Frequency	0-4000(.../min)
Max.Drilling capacity	Φ26
Net Weight	2.93kg

Drill & Hammer & Demolition

ELECTRIC ROTARY HAMMER

AZC02-28



Rated Power Input	960(W)
No-Load Speed	1000(r/min)
Max.Drilling capacity	Φ28
Net Weight	5.0kg

Hammer & Demolition

ELECTRIC ROTARY HAMMER

AZC02-30



Rated Power Input	960(W)
No-Load Speed	1000(r/min)
Max.Drilling capacity	Φ30
Net Weight	5.0kg

Hammer & Demolition

ELECTRIC ROTARY HAMMER

AZC38



Rated Power Input	800(W)
No-Load Speed	400(r/min)
Max.Drilling capacity	Φ38
Net Weight	7.6kg

ELECTRIC ROTARY HAMMER

AZC03-38



Rated Power Input	1100(W)
No-Load Speed	320(r/min)
Max.Drilling capacity	Φ38
Rated Impacting Frequency	2900(.../min)
Net Weight	6.2kg

Hammer & Demolition

ELECTRIC ROTARY HAMMER

AZC26/AZC02-26



Rated Power Input	750(W)
No-Load Speed	500/0-500(r/min)
Max.Drilling capacity	Φ 26
Net Weight	5.0(kg)

AZC02-26

ELECTRIC ROTARY HAMMER

AZC05-26



Rated Power Input	720(W)
No-Load Speed	0-1200(r/min)
Rated Impacting Frequency	0-4000(.../min)
Max.Drilling capacity	Φ26
Net Weight	2.93kg

Drill & Hammer & Demolition

ELECTRIC ROTARY HAMMER

AZC28



Rated Power Input	960(W)
No-Load Speed	1000(r/min)
Rated Impacting Frequency	5000(.../min)
Max.Drilling capacity	Φ28
Net Weight	5.0kg

ELECTRIC ROTARY HAMMER

AZC30



Rated Power Input	960(W)
No-Load Speed	1000(r/min)
Max.Drilling capacity	Φ30
Net Weight	5.0kg

ELECTRIC ROTARY HAMMER

AZC04-30



Rated Power Input	960(W)
No-Load Speed	1000(r/min)
Max.Drilling capacity	Φ30
Net Weight	5.2kg

Hammer & Demolition

ELECTRIC ROTARY HAMMER

AZC02-38



Rated Power Input	1050(W)
No-Load Speed	400(r/min)
Max.Drilling capacity	Φ38
Net Weight	7.5kg

ELECTRIC ROTARY HAMMER

AZC45



Rated Power Input	1500(W)
No-Load Speed	0-305(r/min)
Max.Drilling capacity	Φ45
Net Weight	8.2kg

Hammer & Demolition



DC TOOLS
AC TOOLS
PNEUMATIC TOOLS
MEASURING TOOLS
WELDING MACHINES
GENERATORS
GARDEN TOOLS

DC TOOLS
AC TOOLS
PNEUMATIC TOOLS
MEASURING TOOLS
WELDING MACHINES
GENERATORS
GARDEN TOOLS

PERCUSSION HAMMER
SDS-hex 17mm

AZG6/AZG6S

Rated Power Input	900(W)
Rated Impacting Frequency	2900(.../min)
Net Weight	6.8kg



PERCUSSION HAMMER

AZG04-6

Rated Power Input	900(W)
Rated Impacting Frequency	2900(.../min)
Net Weight	6.8kg



PERCUSSION HAMMER

AZG05-6

Rated Power Input	1050(W)
Rated Impacting Frequency	3000(.../min)
Net Weight	5.5kg



PERCUSSION HAMMER

AZG06-6

Rated Power Input	1350(W)
Rated Impacting Frequency	3900(.../min)
Net Weight	6.8kg



PERCUSSION HAMMER

AZG10

Rated Power Input	1500(W)
Rated Impacting Frequency	900-1890(.../min)
Net Weight	10.4kg



PERCUSSION HAMMER

AZG15

Rated Power Input	1240(W)
Rated Impacting Frequency	1400(.../min)
Net Weight	16kg



PERCUSSION HAMMER

AZG02-15

Rated Power Input	1010(W)
Rated Impacting Frequency	1400(.../min)
Net Weight	16kg



PERCUSSION HAMMER

AZG04-15

Rated Power Input	1520(W)
Rated Impacting Frequency	1450(.../min)
Net Weight	14.3kg



MARBLE CUTTER

AZE110/AZE115

Blade Diameter	Φ110/115 (mm)
Max.cutting Capacity	30(mm)
Rated Power Input	1200(W)
No-load Speed	13000(r/min)
Net Weight	3.0(kg)



MARBLE CUTTER

AZE02-110

Blade Diameter	Φ110 (mm)
Max.cutting Capacity	30(mm)
Rated Power Input	1240(W)
No-load Speed	13000(r/min)
Net Weight	3.1(kg)



MARBLE CUTTER

AZE02-110B

Blade Diameter	Φ110 (mm)
Max.cutting Capacity	30(mm)
Rated Power Input	1240(W)
No-load Speed	13000(r/min)
Net Weight	3.1(kg)



MARBLE CUTTER

AZE03-110

Blade Diameter	Φ110 (mm)
Max.cutting Capacity	34(mm)
Rated Power Input	1050(W)
No-load Speed	13300(r/min)
Net Weight	3.1(kg)



MARBLE CUTTER

AZE04-110

Blade Diameter	Φ110 (mm)
Max.cutting Capacity	30(mm)
Rated Power Input	1240(W)
Bevel cutting angle	0-45(°)
No-load Speed	13000(r/min)
Net Weight	3.2(kg)



MARBLE CUTTER

AZE05-110

Blade Diameter	Φ110 (mm)
Max.cutting Capacity	30(mm)
Rated Power Input	1600(W)
Bevel cutting angle	0-45(°)
No-load Speed	12000(r/min)
Net Weight	3.2(kg)



MARBLE CUTTER

AZE06-110

Blade Diameter	Φ110 (mm)
Max.cutting Capacity	30(mm)
Rated Power Input	1800(W)
No-load Speed	13500(r/min)
Net Weight	3.3(kg)



MARBLE CUTTER

AZE180

Blade Diameter	Φ180 (mm)
Max.cutting Capacity	60(mm)
Rated Power Input	1520(W)
No-load Speed	5000(r/min)
Net Weight	7.0(kg)



MARBLE CUTTER

AZE02-180

Blade Diameter	Φ180 (mm)
Max.cutting Capacity	58(mm)
Rated Power Input	1900(W)
No-load Speed	5000(r/min)
Net Weight	7.0(kg)



ELECTRIC GROOVE CUTTER

AZR110

Blade Diameter	Φ110(mm)
Rated Power Input	1600(W)
No-Load Speed	10800(r/min)
Max. Cutting Depth	32(mm)
Max. Cutting Width	50(mm)
Net Weight	4.1(kg)



ELECTRIC GROOVE CUTTER

AZR02-150

Blade Diameter	Φ150(mm)
Rated Power Input	1400(W)
No-Load Speed	7000(r/min)
Max. Cutting Depth	30(mm)
Max. Cutting Width	32(mm)
Net Weight	6.1(kg)



ELECTRIC GROOVE CUTTER

AZR180

Blade Diameter	Φ180(mm)
Rated Power Input	1900(W)
No-Load Speed	5000(r/min)
Max. Cutting Depth	58(mm)
Max. Cutting Width	50(mm)
Net Weight	8.0(kg)



ELECTRIC MIXER

AQU160/AQU160B

Rated Power Input	800(W)
No-Load Speed	680(r/min)
Net Weight	2.4/3.5(kg)

ELECTRIC MIXER

AQU02-160

Rated Power Input	1010(W)
No-Load Speed	620(r/min)
Dia.OF Mixing Wheel	Φ160(mm)
Net Weight	3.5(kg)

ELECTRIC MIXER

AQU04-160

Rated Power Input	900(W)
No-Load Speed	500(r/min)
Net Weight	2.5(kg)

ELECTRIC MIXER

AQU05-160

Rated Power Input	1800(W)
No-Load Speed	2000(r/min)
Net Weight	5.5(kg)



ORBITAL SANDER



ASA125

Rated Power Input	300(W)
Orbits Frequency	4000-12000(.../min)
Pad size	125(mm)
Net Weight	1.3(kg)

ORBITAL SANDER



ASB104

Rated Power Input	200(W)
Orbits Frequency	13000(.../min)
Pad size	70x104(mm)
Net Weight	1.2(kg)

ORBITAL SANDER



ASB100/ASB100B

Rated Power Input	150/180(W)
Orbits Frequency	12000/13000(.../min)
Pad size	100x110(mm)
Net Weight	1.3(kg)

ORBITAL SANDER



ASB02-100

Rated Power Input	200(W)
Orbits Frequency	14000(.../min)
Pad size	100x110(mm)
Net Weight	1.3(kg)

ORBITAL SANDER



ASB02-185

Rated Power Input	220(W)
Orbits Frequency	12000(.../min)
Pad size	93x185(mm)
Net Weight	1.6(kg)

ORBITAL SANDER



ASB02-234B

Rated Power Input	330(W)
Orbits Frequency	7500(.../min)
Pad size	114x227(mm)
Net Weight	2.9(kg)

BELT SANDER



AST9x533

Rated Power Input	500(W)
Belt Speed	5-28(m/s)
Belt Size	9x533(mm)
Net Weight	1.5(kg)

DISC SANDER



ASA150

Rated Power Input	405(W)
Rated Speed	4700(r/min)
Grinding Disc Dia.	Φ150
Net Weight	1.6(kg)

ORBITAL SANDER



ASB03-100

Rated Power Input	240(W)
Orbits Frequency	14000(.../min)
Pad size	100x110(mm)
Net Weight	1.2(kg)

ORBITAL SANDER



ASB04-100

Rated Power Input	240(W)
Orbits Frequency	14000(.../min)
Pad size	100x110(mm)
Net Weight	1.2(kg)

ORBITAL SANDER



ASB185/ASB185B

Rated Power Input	160/200(W)
Orbits Frequency	10000/11000(.../min)
Pad size	93x185(mm)
Net Weight	1.7/1.6(kg)

ORBITAL SANDER



ASB234

Rated Power Input	520(W)
Orbits Frequency	10000(.../min)
Pad size	114x234(mm)
Net Weight	2.9(kg)

ORBITAL SANDER



ASB02-234

Rated Power Input	330(W)
Orbits Frequency	10000(.../min)
Pad size	114x227(mm)
Net Weight	2.9(kg)

BELT SANDER



AST533

Rated Power Input	550(W)
Belt Speed	3.3-16.6(m/s)
Belt Size	30x533(mm)
Net Weight	2.1(kg)

DC TOOLS

AC TOOLS

PNEUMATIC TOOLS

MEASURING TOOLS

WELDING MACHINES

GENERATORS

GARDEN TOOLS

DC TOOLS

AC TOOLS

PNEUMATIC TOOLS

MEASURING TOOLS

WELDING MACHINES

GENERATORS

GARDEN TOOLS



AST610

Rated Power Input	1200(W)
Belt Speed	500(m/s)
Belt Size	100×610(mm)
Net Weight	5.8(kg)



AMB02-82

Max.Planning Width	82(mm)
Max.Planning Depth	1(mm)
Rated Power Input	500(W)
No-Load Speed	15000(r/min)
Net Weight	2.6(kg)



AMB110

Max.Planning Width	110(mm)
Max.Planning Depth	2(mm)
Rated Power Input	840(W)
No-Load Speed	16500(r/min)
Net Weight	4.2(kg)



AMQ85

Rated Power Input	580(W)
No-Load Strokes	500-3100(./min)
Bevel Cutting Angle	0-45°(Left/Right)
Max. Cutting Capacity	Steel 10(mm) Wood 85(mm)
Net Weight	2.7(kg)



AMP03-6

Rated Power Input	530(W)
Rated Speed	30000(r/min)
Max. Milling Cutter Dia.	6/6.35(mm)
Net Weight	1.8(kg)



AMR8

Rated Power Input	900(W)
Max. Milling Cutter Dia.	Ø8(mm)
No-Load Speed	26000(r/min)
Net Weight	2.9(kg)



AMR02-12

Rated Power Input	1650(W)
Max. Milling Cutter Dia.	Φ12/12.7(mm)
No-Load Speed	22000(r/min)
Net Weight	6.0(kg)



ELECTRIC PLANER

AMB82

Max.Planning Width	82(mm)
Max.Planning Depth	1(mm)
Rated Power Input	500(W)
No-Load Speed	16000(r/min)
Net Weight	2.9(kg)



ELECTRIC PLANER

AMB03-82

Max.Planning Width	82(mm)
Max.Planning Depth	1(mm)
Rated Power Input	500(W)
No-Load Speed	16000(r/min)
Net Weight	2.9(kg)



JIG SAW

AMQ65

Rated Power Input	600(W)
No-Load Strokes	500-3000(./min)
Bevel Cutting Angle	0-45°(Left/Right)
Max. Cutting Capacity	Steel 10(mm) Wood 65(mm)
Net Weight	2.5(kg)



TRIMMER

AMP02-6

Rated Power Input	350(W)
Rated Speed	30000(r/min)
Max. Milling Cutter Dia.	6/6.35(mm)
Net Weight	1.8(kg)



TRIMMER

AMP04-6

Rated Power Input	550(W)
Rated Speed	30000(r/min)
Max. Milling Cutter Dia.	6/6.35(mm)
Net Weight	1.6(kg)



WOOD ROUTER

AMR12

Rated Power Input	1600(W)
Max. Milling Cutter Dia.	Φ12/12.7(mm)
No-Load Speed	23000(r/min)
Net Weight	6.0(kg)



WOOD ROUTER

AMR03-12

Rated Power Input	1050(W)
Max. Milling Cutter Dia.	Φ12/12.7(mm)
No-Load Speed	23000(r/min)
Net Weight	3.5(kg)



WOOD ROUTER

AMR04-12

Rated Power Input	1650(W)
Max. Milling Cutter Dia.	Φ12/12.7(mm)
No-Load Speed	22000(r/min)
Net Weight	6.0(kg)



RECIPROCATING SAW

AJF30

Rated Power Input	590(W)
No-Load Strokes	0-2300(./min)
Length Of Strokes	30(mm)
Max. Cutting Capacity	Steel 90(mm) Wood 90(mm)
Net Weight	3.2(kg)



ELECTRIC CHAIN SAW

AML405

No-Load Speed	400(m/min)
Rated Power Input	1800(W)
Max. Length Of Guide Bar	405(mm)
Net Weight	4.5(kg)



ELECTRIC CHAIN SAW

AML02-300/ AML350

No-Load Speed	800(m/min)
Rated Power Input	1800(W)
Max. Length Of Guide Bar	300/350(mm)
Net Weight	4.5(kg)



ELECTRIC CIRCULAR SAW

AMY185

Rated Power Input	1100(W)
No-Load Speed	4900(r/min)
Max. Cutting Capacity	64(mm)
Max. Cutting Angle	45°
Net Weight	5.0(kg)



ELECTRIC CIRCULAR SAW

AMY03-185

Rated Power Input	1400(W)
No-Load Speed	5300(r/min)
Max. Cutting Capacity	64(mm)
Max. Cutting Angle	45°
Net Weight	5.0(kg)



ELECTRIC CIRCULAR SAW

AMY02-235

Rated Power Input	2000(W)
No-Load Speed	4100(r/min)
Max. Cutting Capacity (90°)	85(mm)
	(45°) 60
Max. Cutting Angle	50°
Net Weight	6.5(kg)



WOOD ROUTER

AMR05-12

Rated Power Input	1240(W)
Max. Milling Cutter Dia.	Φ12/12.7(mm)
No-Load Speed	24000(r/min)
Net Weight	4.6(kg)



ELECTRIC CHAIN SAW

AML300

No-Load Speed	400(m/min)
Rated Power Input	1300(W)
Max. Length Of Guide Bar	300(mm)
Net Weight	5.3(kg)



ELECTRIC CHAIN SAW

AML02-405

No-Load Speed	400(m/min)
Rated Power Input	1300(W)
Max. Length Of Guide Bar	405(mm)
Net Weight	5.6(kg)



ELECTRIC CHAIN SAW

AML04-405/ AML450

No-Load Speed	800(m/min)
Rated Power Input	1800(W)
Max. Length Of Guide Bar	405/450(mm)
Net Weight	4.5(kg)



ELECTRIC CIRCULAR SAW

AMY02-185

Rated Power Input	1100(W)
No-Load Speed	5600(r/min)
Max. Cutting Capacity	64(mm)
Max. Cutting Angle	45°
Net Weight	3.6(kg)



ELECTRIC CIRCULAR SAW

AMY235

Rated Power Input	1520(W)
No-Load Speed	4100(r/min)
Max. Cutting Capacity	84(mm)
Max. Cutting Angle	45°
Net Weight	7.5(kg)



DUST-FREE SAW

AFF02-150

Rated Power Input	1400(W)
No-Load Speed	5300(r/min)
Blade Dia.	105-150(mm)
Fan Rated Power	1000(W)
Maximum Vacuum Degree	24000(Pa)
Net Weight	11.9(kg)



SANDER POLISHER ASP180

Rated Power Input	750(W)
Rated Speed	2500-3400(r/min)
Wheel Size	Φ180(mm)
Net Weight	3.6(kg)



SANDER POLISHER ASP03-180

Rated Power Input	1020(W)
Rated Speed	1000-3600(r/min)
Wheel Size	Φ180(mm)
Net Weight	3.6(kg)



SANDER POLISHER ASP05-180

Rated Power Input	1250(W)
Rated Speed	600-3500(r/min)
Wheel Size	Φ180(mm)
Net Weight	3.4(kg)



ELECTRIC SHEAR AJJ32

Rated Power Input	620(W)
Max. Cutting Capacity	
Mild Steel	3.2(mm)
Stainless	2.5(mm)
Min. Cutting Radius	50(mm)
Rated Strokes	1600(./min)
Net Weight	3.8(kg)



ELECTRIC SHEAR AJJ25

Rated Power Input	710(W)
Max. Cutting Capacity	
Mild Steel	2.5(mm)
Hard Steel Plate	2.0(mm)
Stainless	2.0(mm)
Aluminium Sheet	3.2(mm)
Min. Cutting Radius	45(mm)
Rated Strokes	2200(./min)
Net Weight	2.3(kg)



ELECTRIC CUT-OFF MACHINE AJG02-355

Wheel Size	355 x 3 x 25.4(mm)
Rated Power Input	2000(W)
No-Load Speed	3800(r/min)
Net Weight	16(kg)



SANDER POLISHER ASP02-180

Rated Power Input	570(W)
Rated Speed	1000-2400(r/min)
Wheel Size	Φ180(mm)
Net Weight	3.3(kg)



SANDER POLISHER ASP04-180

Rated Power Input	1400(W)
Rated Speed	690-3800(r/min)
Wheel Size	Φ180(mm)
Net Weight	3.4(kg)



DRYWALL SANDER ASF225

Rated Power Input	650(W)
Rated Speed	800-1650(r/min)
Grinding Disc Dia.	Φ225(mm)
Net Weight	4.7(kg)



ELECTRIC NIBBLER AJH32

Rated Power Input	620(W)
No-Load Strokes	1300(./min)
Max. Cutting Capacity	
Mild Steel	3.2(mm)
Stainless	2.5(mm)
Min. Cutting Radius	
Inner Dia.	120(mm)
Outer Dia.	128(mm)
Net Weight	3.8(kg)



ELECTRIC CUT-OFF MACHINE AJG04-355B

Wheel Size	355 x 3 x 25.4(mm)
Rated Power Input	2000(W)
No-Load Speed	3800(r/min)
Net Weight	17(kg)



ELECTRIC CUT-OFF MACHINE AJG03-355

Wheel Size	355 x 3 x 25.4(mm)
Rated Power Input	2100(W)
No-Load Speed	3900(r/min)
Net Weight	16(kg)



ELECTRIC CUT-OFF MACHINE AJG04-355

Wheel Size	355 x 3 x 25.4(mm)
Rated Power Input	2000(W)
No-Load Speed	3800(r/min)
Net Weight	14(kg)




ELECTRIC CUT-OFF MACHINE A3JG400

Wheel Size	400 x3.2x 32(mm)
Rated Power Input	3000(W)
No-Load Speed	2800(r/min)
Net Weight	58(kg)



ELECTRIC CUT-OFF MACHINE A3JG05-400

Wheel Size	400 x3.2x 32(mm)
Rated Power Input	3000(W)
No-Load Speed	2840(r/min)
Net Weight	66(kg)



ELECTRIC MITER SAW AJX03-255

Rated Power Input	1650(W)
No-load Speed	6000(r/min)
Blade Diameter	255(mm)
Net Weight	12(kg)



MAGNETIC DRILL AJC02-23

Rated Power Input	1600(W)
Max. Drilling Capacity	Φ23Φ50(mm)
Magnetism	15000(N)
No-load Speed	130-260/260-520r/min
Max. Stroke	220 (mm)
Connector	Mt3 Shank
Net Weight	24(kg)



ELECTRIC CUT-OFF MACHINE A3JG03-400

Wheel Size	400 x3.2x 32(mm)
Rated Power Input	3000(W)
No-Load Speed	2800(r/min)
Net Weight	63(kg)



ELECTRIC MITER SAW AJX255

Rated Power Input	1650(W)
No-load Speed	4600(r/min)
Blade Diameter	255(mm)
Net Weight	12(kg)




ELECTRIC MITER SAW AJX355

Rated Power Input	1380(W)
No-load Speed	3200(r/min)
Blade Diameter	355(mm)
Net Weight	34(kg)



MAGNETIC DRILL AJC16

Rated Power Input	900(W)
Max. Drilling Capacity	Φ16(mm)
Magnetism	11500(N)
No-load Speed	450(r/min)
Max. Stroke	140 (mm)
Connector	Mt2 Shank
Net Weight	11.5(kg)



DC TOOLS
AC TOOLS
PNEUMATIC TOOLS
MEASURING TOOLS
WELDING MACHINES
GENERATORS
GARDEN TOOLS

DC TOOLS
AC TOOLS
PNEUMATIC TOOLS
MEASURING TOOLS
WELDING MACHINES
GENERATORS
GARDEN TOOLS

MAGNETIC DRILL



AJC23/AJC23S

Rated Power Input	1500(W)
Max. Drilling Capacity	
Twist Drill Bit	Φ23(mm)
Core Drill Bit	Φ50(mm)
Magnetism	15000(N)
No-load Speed	390(r/min)
Max. Stroke	220(mm)
Connector	M12 Shank
Net Weight	21(kg)

MAGNETIC DRILL



AJC30

Rated Power Input	900(W)
Max. Drilling Capacity	Φ30
Magnetism	11500(N)
No-load Speed	450(r/min)
Max. Stroke	140(mm)
Connector	Straight ShankΦ19mm
Net Weight	11.5(kg)

ELECTRIC WRENCH



APB16

Rated Power Input	450(W)
No-Load Speed	1800(r/min)
Rated Impacting Frequency	2000(./min)
Capacities(Bolt Size)	M10-M16(mm)
Square Drive	12.7 x 12.7(mm)
Max. Fastening Torque	240-300(N.M)
Net Weight	2.6(kg)

ELECTRIC WRENCH



APB12

Rated Power Input	300(W)
No-Load Speed	1800(r/min)
Rated Impacting Frequency	2000(./min)
Capacities(Bolt Size)	M8-M12(mm)
Square Drive	12.7 x 12.7(mm)
Max. Fastening Torque	188(N.M)
Net Weight	2.1(kg)

ELECTRIC WRENCH



APB20C

Rated Power Input	340(W)
No-Load Speed	1700(r/min)
Rated Impacting Frequency	2000(./min)
Capacities(Bolt Size)	M12-M20(mm)
Square Drive	12.7 x 12.7(mm)
Max. Fastening Torque	294(N.M)
Net Weight	3.2(kg)

ELECTRIC WRENCH



APB22C

Rated Power Input	620(W)
No-Load Speed	1700(r/min)
Rated Impacting Frequency	1600(./min)
Capacities(Bolt Size)	M16-M22(mm)
Square Drive	19 x 19(mm)
Max. Fastening Torque	588(N.M)
Net Weight	5(kg)

IMPACT SCREWDRIVER



APL6

Rated Power Input	710(W)
No-Load Speed	0-4300(r/min)
Max. Screw Diameter	6(mm)
Net Weight	1.6(kg)

IMPACT SCREWDRIVER



APL8

Rated Power Input	300(W)
No-Load Speed	0-2200(r/min)
Rated Impacting Frequency	0-3000(./min)
Max. Fastening Torque	98(n.m)
Net Weight	1.3(kg)

ELECTRIC WRENCH



APB30

Rated Power Input	1050(W)
No-Load Speed	1400(r/min)
Rated Impacting Frequency	1500(./min)
Capacities(Bolt Size)	M24-M30(mm)
Square Drive	25.4 x 25.4(mm)
Max. Fastening Torque	400-900(N.M)
Net Weight	10(kg)

SHEAR WRENCH



APB24E

Rated Power Input	1050(W)
No-Load Speed	18(r/min)
Max. Fastening Torque	1100(N.M)
Net Weight	8.0(kg)

DIAMOND DRILL WITH WATER SOURCE



AZK150

Rated Power Input	2000(W)
No-Load Speed	1900(r/min)
Max. Drilling Capacity	Φ150(mm)
Net Weight	7.2(kg)

DIAMOND DRILL WITH WATER SOURCE



AZZ90/AZZ90S

Rated Power Input	1350(W)
No-Load Speed	0-2300/0-2000(r/min)
Max. Drilling Capacity	Φ90(mm)
Net Weight	4.4(kg)

DIAMOND DRILL WITH WATER SOURCE



AZZ03-110

Rated Power Input	1800(W)
No-Load Speed	1900(r/min)
Max. Drilling Capacity	
Concrete	Φ110(mm)
Brick wall	Φ160(mm)
Net Weight	5.3(kg)

DIAMOND DRILL WITH WATER SOURCE



AZZ02-160

Rated Power Input	1800(W)
No-Load Speed	1900(r/min)
Max. Drilling Capacity	Φ160(mm)
Net Weight	5.2(kg)

DIAMOND DRILL WITH WATER SOURCE



AZZ180

Rated Power Input	2000(W)
No-Load Speed	1900(r/min)
Max. Drilling Capacity	Φ180(mm)
Net Weight	7.0(kg)

DIAMOND DRILL WITH WATER SOURCE



AZZ03-160

Rated Power Input	1800(W)
No-Load Speed	1900(r/min)
Max. Drilling Capacity	Φ160(mm)
Net Weight	11.7(kg)

DIAMOND DRILL WITH WATER SOURCE



AZZ02-200S

Rated Power Input	3500(W)
No-Load Speed	700(r/min)
Max. Drilling Capacity	Φ200(mm)
Net Weight	25(kg)

DIAMOND DRILL WITH WATER SOURCE



AZZ03-200

Rated Power Input	3800(W)
No-Load Speed	700(r/min)
Max. Drilling Capacity	Φ200(mm)
Net Weight	25(kg)

VACUUM CLEANER



AVC15

Rated Power Input	1200(W)
Capacity	15(L)
Cooling System	Recycle
Net Weight	7.6(kg)

DIAMOND DRILL WITH WATER SOURCE



AZZ02-180

Rated Power Input	2000(W)
No-Load Speed	1900(r/min)
Max. Drilling Capacity	Φ180(mm)
Net Weight	6.2(kg)

DIAMOND DRILL WITH WATER SOURCE



AZZ190

Rated Power Input	1800(W)
No-Load Speed(r/min)	Max. Drilling Capacity(mm)
Gear1 750 r/min	Brick wall 110-190mm
Gear2 1650 r/min	Brick wall 165-110mm
Gear3 3300 r/min	Brick wall 15-65mm
Net Weight	6.0(kg)

DIAMOND DRILL WITH WATER SOURCE



AZZ130/AZZ02-130

Rated Power Input	1350/1800(W)
No-Load Speed	1100/1200(r/min)
Max. Drilling Capacity	Φ130(mm)
Net Weight	12/11.6(kg)

DIAMOND DRILL WITH WATER SOURCE



AZZ200

Rated Power Input	3300(W)
No-Load Speed	500(r/min)
Max. Drilling Capacity	Φ200(mm)
Net Weight	22(kg)

DIAMOND DRILL WITH WATER SOURCE



AZZ02-250

Rated Power Input	3800(W)
No-Load Speed	390/1100(r/min)
Max. Drilling Capacity	Φ250(mm)
Net Weight	25(kg)

DIAMOND DRILL WITH WATER SOURCE



AZZ250

Rated Power Input	3800(W)
No-Load Speed	580(r/min)
Max. Drilling Capacity	Φ250(mm)
Net Weight	25(kg)

VACUUM CLEANER



AVC30C

Rated Power Input	1200(W)
Capacity	30(L)
Cooling System	Recycle
Net Weight	9.2(kg)

VACUUM CLEANER



AVC30

Rated Power Input	1200(W)
Capacity	30(L)
Cooling System	Recycle
Net Weight	8.8(kg)



VACUUM CLEANER



AVC80

Rated Power Input	3200(W)
Capacity	80(L)
Cooling System	Recycle
Net Weight	26.5(kg)



BLOWER VACUUM



AQF25

Rated Power Input	480(W)
No-load Speed	14000(r/min)
The Max Gas Volume	2.5(m³/min)
Net Weight	1.8(kg)



HEAT GUN



AQB02-1600

Rated Power Input	1600(W)
Temperature Low Temperature	50-400(°C)
High Temperature	50-550(°C)
Air Flow Low Temperature	190-210(L/min)
High Temperature	310-350(L/min)
Net Weight	0.8(kg)



HEAT GUN



DQB03-2000

Rated Power Input	2000(W)
Temperature Low Temperature	50-630(°C)
High Temperature	50-630(°C)
Air Flow Low Temperature	300(L/min)
High Temperature	500(L/min)
Net Weight	0.7(kg)



AIRLESS HIGH-PRESSURE SPRAYING UNIT



APWG3.5

Rated Power Input	2200(W)
No-load Speed	1440(r/min)
The Max Operating Pressure	20/3000 PSI
FLOW	3.5(L/min)
Net Weight	37(kg)

VACUUM CLEANER



AVC60

Rated Power Input	2300(W)
Capacity	60(L)
Cooling System	Recycle
Net Weight	24(kg)



VACUUM CLEANER



AVC02-80

Rated Power Input	3200(W)
Capacity	80(L)
Cooling System	Recycle
Net Weight	36.6(kg)



BLOWER VACUUM



AQF32

Rated Power Input	680(W)
No-load Speed	8300-16300(r/min)
The Max Gas Volume	1.6-3.2(m³/min)
Net Weight	1.8(kg)



HEAT GUN



AQB2000

Rated Power Input	2000(W)
Temperature Low Temperature	50-480(°C)
High Temperature	50-600(°C)
Air Flow Low Temperature	210-250(L/min)
High Temperature	340-380(L/min)
Net Weight	0.8(kg)



HEAT GUN




DQB04-2000

Rated Power Input	2000(W)
Temperature Low Temperature	50-480(°C)
High Temperature	50-600(°C)
Air Flow Low Temperature	210-250(L/min)
High Temperature	340-380(L/min)
Net Weight	0.7(kg)



PNEUMATIC TOOLS

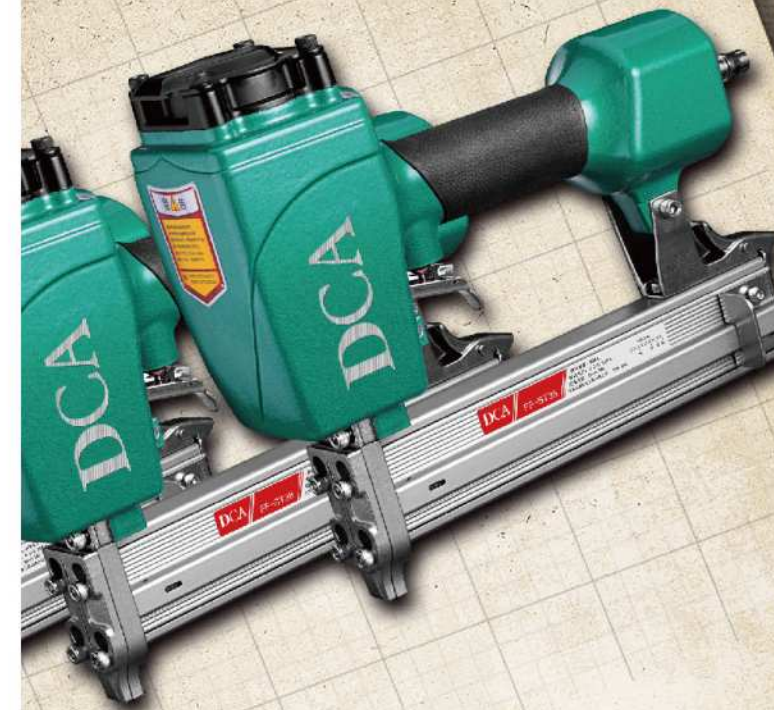

DC TOOLS

AC TOOLS

PNEUMATIC TOOLS

MEASURING TOOLS

WELDING MACHINES

GENERATORS

GARDEN TOOLS

DC TOOLS / AC TOOLS / PNEUMATIC TOOLS / MEASURING TOOLS / WELDING MACHINES / GENERATORS / GARDEN TOOLS

DC TOOLS / AC TOOLS / PNEUMATIC TOOLS / MEASURING TOOLS / WELDING MACHINES / GENERATORS / GARDEN TOOLS



AIR BRAD NAILER AF30

Working Pressure	4-8(Bar)
Inner Diameter of Air Pipe	8 (mm)
Capacity of Magazine	100(PCS)
Nail Type	Brad Nail
Nail Size	Φ1.05 x30 (max) (mm)
Net Weight	1.1(kg)



AIR BRAD NAILER AF30B

Working Pressure	4-8(Bar)
Inner Diameter of Air Pipe	8 (mm)
Capacity of Magazine	100(PCS)
Nail Type	Brad Nail
Nail Size	Φ1.05 x30 (max) (mm)
Net Weight	1.1(kg)



AIR BRAD NAILER AT50DC

Working Pressure	4-8(Bar)
Inner Diameter of Air Pipe	8(mm)
Capacity of Magazine	100(PCS)
Nail Type	Brad Nail
Nail Size	1.6 x1.4 x50 (max)(mm)
Net Weight	2.1(kg)



AIR STAPLER A1013J

Working Pressure	4-8(Bar)
Inner Diameter of Air Pipe	8(mm)
Capacity of Magazine	100(PCS)
Nail Type	Staple
Nail Size	0.6 x10 x13 (max)(mm)
Net Weight	0.85(kg)



AIR STAPLER A1022J

Working Pressure	4-8(Bar)
Inner Diameter of Air Pipe	8 (mm)
Capacity of Magazine	100(PCS)
Nail Type	Staple
Nail Size	0.6 x10 x22(mm)
Net Weight	1.1(kg)



AIR STAPLER A422J

Working Pressure	4-8(Bar)
Inner Diameter of Air Pipe	8 (mm)
Capacity of Magazine	100(PCS)
Nail Type	Staple
Nail Size	0.6 x4 x22(mm)
Net Weight	1.1(kg)



AIR STAPLER A440K

Working Pressure	5-8(Bar)
Inner Diameter of Air Pipe	8 (mm)
Capacity of Magazine	100(PCS)
Nail Type	Staple
Nail Size	1.26 x1.05 x40(max)(mm)
Net Weight	2(kg)



AIR STAPLER AN851B

Working Pressure	5-8(Bar)
Inner Diameter of Air Pipe	8 (mm)
Capacity of Magazine	150(PCS)
Nail Type	Staple
Nail Size	1.6x1.4 x51 (max)(mm)
Net Weight	2.9(kg)



AIR PIN NAILER AP625

Working Pressure	4-8(Bar)
Inner Diameter of Air Pipe	8 (mm)
Capacity of Magazine	100(PCS)
Nail Type	Pin Nail
Nail Size	Φ0.63 x25 (max) (mm)
Net Weight	0.85(kg)



AIR CONCRETE NAILER AST38

Working Pressure	5-8(Bar)
Inner Diameter of Air Pipe	8 (mm)
Capacity of Magazine	80(PCS)
Nail Type	Steel Nail
Nail Size	Φ2.2 x38 (max) (mm)
Net Weight	2.1(kg)



AIR CONCRETE NAILER AST64C

Working Pressure	4-8(Bar)
Inner Diameter of Air Pipe	8 (mm)
Capacity of Magazine	75(PCS)
Nail Type	Steel Nail
Nail Size	Φ2.2 (18-64) (mm)
Net Weight	3(kg)



DIRECT-DRIVE AIR COMPRESSOR AQE 2024F

Working Pressure	8(Bar)
Rated Power Input	2.5(hp)
Capacity	24(l)
Displacement	206(L/min)
Net Weight	26(kg)



OIL-FREE AIR COMPRESSOR

AQE02-1824



Working Pressure	7 (Bar)
Rated Power Input	800(W)
Capacity	24(L)
Displacement	≥77(L/min)
Net Weight	20(kg)

OIL-FREE AIR COMPRESSOR

AQE02-2850



Working Pressure	8 (Bar)
Rated Power Input	1600(W)
Capacity	0-50(L)
Displacement	≥154(L/min)
Net Weight	45(kg)

MEASURING TOOLS



LASER LEVEL



AFF41

Laser Diode	635(nm)
Centering Laser Diode	650(mm)
Vertical Accuracy	5m±1mm
Leveling Accuracy	5m±1mm
Auto-leveling Range	±3°
Width of Laser Line	2mm at distance of 5m
Power Supply	3x 1.5VLR6 (AA)
Operating Temperature	-10°C ~45°C
Laser Class	2

LASER LEVEL



AFF21

Laser Diode	635(nm)
Centering Laser Diode	650(mm)
Vertical Accuracy	5m±1mm
Leveling Accuracy	5m±1mm
Auto-leveling Range	±3°
Width of Laser Line	2mm at distance of 5m
Power Supply	3x 1.5VLR6 (AA)
Operating Temperature	-10°C ~45°C
Laser Class	2

GREEN LASER LEVEL



AFF04-11

Laser Diode	532(nm)
Centering Laser Diode	650(mm)
Vertical Accuracy	5m±1mm
Leveling Accuracy	5m±1mm
Auto-leveling Range	±3°
Width of Laser Line	2mm at distance of 5m
Power Supply	3x 1.5VLR6 (AA)
Operating Temperature	0°C ~40°C
Laser Class	3A

LASER DISTANCE METER



AFF03-40

Measuring Range	0.05-40(m)
Accuracy of Measurement	±1.5(mm)
Laser Diode	620-650nm, P<1mw(nm)
Laser Class	2
Min. Display Unit (mm)	1
Auto Cut-off (without operation for)	180s
Battery lifetime (Individual Measurements)	5000
Battery Specification	2x 1.5V (AAA) Alkaline battery
Working Temperature	-10°C ~50°C
Storage Temperature	-25°C ~70°C
Product size	122x46x25(mm)
Net Weight	105 (g)

LASER DISTANCE METER



AFF02-100

Measuring Range	0.1-100(m)
Accuracy of Measurement	±1.5(mm)
Laser Diode	620-650nm, P<1mw(nm)
Laser Class	2
Min. Display Unit (mm)	1
Auto Cut-off (without operation for)	150s
Battery lifetime (Individual Measurements)	4000
Battery Specification	3x 1.5V (AAA) Alkaline battery
Working Temperature	0°C ~+40°C
Storage Temperature	-20°C ~+60°C
Product size	120x60x28(mm)
Net Weight	180(g)

LASER LEVEL



AFF11

Laser Diode	635(nm)
Centering Laser Diode	650(mm)
Vertical Accuracy	5m±1mm
Leveling Accuracy	5m±1mm
Auto-leveling Range	±3°
Width of Laser Line	2mm at distance of 5m
Power Supply	3x 1.5VLR6 (AA)
Operating Temperature	-10°C ~45°C
Laser Class	2

LASER LEVEL



AFF360

Laser Diode	635(nm)
Working Range Dia.	20m
Automatic Level Adjustment	≤4S
Leveling Accuracy	1m±0.3mm
Auto-leveling Range	±4°
Power Supply	4x 1.5VLR6 (AA)
Operating Temperature	5°C ~40°C
Storage Temperature	-20°C ~70°C
Laser Class	2

LASER LEVEL



AFF04-21/AFF04-41

Laser Diode	532(nm)
Centering Laser Diode	650(mm)
Vertical Accuracy	5m±1mm
Leveling Accuracy	5m±1mm
Auto-leveling Range	±3°
Width of Laser Line	2mm at distance of 5m
Power Supply	3x 1.5VLR6 (AA)
Operating Temperature	0°C ~40°C
Laser Class	3A

LASER DISTANCE METER



AFF03-60

Measuring Range	0.05-60(m)
Accuracy of Measurement	±1.5(mm)
Laser Diode	620-650nm, P<1mw(nm)
Laser Class	2
Min. Display Unit (mm)	1
Auto Cut-off (without operation for)	180s
Battery lifetime (Individual Measurements)	5000
Battery Specification	2x 1.5V (AAA) Alkaline battery
Working Temperature	-10°C ~50°C
Storage Temperature	-25°C ~70°C
Product size	122x46x25(mm)
Net Weight	105 (g)

LASER DISTANCE METER



AFF03-80

Measuring Range	0.1-80(m)
Accuracy of Measurement (mm)	±1.5
Laser Diode	620-650nm, P<1mw (nm)
Laser Class	2
Min. Display Unit	1(mm)
Auto Cut-off (without operation for)	180s
Battery lifetime (Individual Measurements)	1000
Battery Specification	2x 1.5V (AAA) Alkaline battery
Working Temperature	-10°C ~50°C
Storage Temperature	-25°C ~70°C
Product size	122x46x25(mm)
Net Weight	105(g)

WELDING MACHINES



DC INVERTER MIG/MAG WELDER

	NBC-500 (Separated Type)	NBC-350 (Separated Type)	NBC-270 (Integral Type)	NBC-270 (Separated Type)
Power Voltage (V)	Three-phase AC 380±10%	Three-phase AC 380±10%	Three-phase AC 380±10%	Three-phase AC 380±10%
Frequency (Hz)	50/60	50/60	50/60	50/60
Rated Input Current (A)	31.8	21.4	10.1	10.1
ARC Current Range (A)	30-400		30-220	30-220
MIG Current Range (A)	30-450	30-350	30-220	30-220
MIG Voltage Range (V)	15.5-36.5	16.5-31.5	15.5-25	15.5-25
No-Load Voltage (V)	68	66	68	68
Wire Feeding Speed Range (m/min)	1.5~1.8	1.5~1.6	2.5-18	2.5-18
Applicable Wire Diameter (mm)	0.8/1.0/1.2/1.6	0.8/1.0/1.2	0.8/1.0/1.2	0.8/1.0/1.2
Rated Duty Cycle	60%	60%	60%	60%
Efficiency	85	85	85	85
Power Factor	0.93	0.93	0.92	0.92
Insulation Grade	F	F	F	F
Housing Protection Grade	IP21	IP21	IP21	IP21
Net Weight (Kg)	36	36	25	25



DC INVERTER MIG/MAG WELDER

	LGK-55	LGK-70	LGK-100
Power Voltage (V)	Three-phase AC 380±10%	Three-phase AC 380±10%	Three-phase AC 380±10%
Frequency (Hz)	50/60	50/60	50/60
Rated Input Current (A)	11.9	14.8	19
No-Load Voltage (V)	300	300	300
Output Current (A)	20-50	20-60	30-80
Rated Output Voltage (V)	100	104	112
Rated Duty Cycle (%)	60	60	60
No-Load Loss (W)	80	80	80
Efficiency (%)	85	85	85
Power Factor	0.93	0.93	0.93
Insulation Grade	F	F	F
Housing Protection Grade	IP21	IP21	IP21
Arc Striking Way	Non-contact Striking	Non-contact Striking	Non-contact Striking
Suggested Cutting Pressure (Kg/cm ²)	4-5	4-5	4-6
Net Weight (Kg)	15	15	15





DC INVERTER TIG WELDER

Model	TIG 140	TIG 160	TIG 200
Power voltage(V)	single phase AV220V/AC240V ± 15%	single phase AV220V/AC240V ± 15%	single phase AV220V/AC240V ± 15%
Frequency (Hz)	50/60	50/60	50/60
Rated input current (A)	12.7	15.3	18
Output current. (A)	10-140	10~160	10~180
Rated output (V)	15.6	16.4	17.2
No-load volt. (V)	40	40	40
Arc Current Range (A)	—	—	—
Rated duty cycle(%)	60	60	60
No-load loss (W)	40	40	40
Arc striking way	HF	HF	HF
Efficiency (%)	85	85	85
Power factor	0.73	0.73	0.73
Insulation grade	F	F	F
Housing protection grade	IP21S	IP21S	IP21S
Weight (Kg)	8.6	9	9.4
Dimensions (mm)	455×270×345	455×270×345	455×270×345
Arc striking way	HF	HF	HF

DC INVERTER ARC WELDER(MMA)

Model	MMA 120/ARC 120	MMA 140/ARC 140	MMA 160/ARC 160	MMA 200/ARC 200	MMA 250/ARC 250	MMA 300/ARC 300
Input voltage	1phase AV220V/AC240V ± 15%	1phase AV220V/AC240V ± 15%	1phase AV220V/AC240V ± 15%	1 phase AV220V/AC240V ± 15%	3 phase AV220V/AC380V ± 15%	1 phase AV220V/AC380V ± 15%
Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Rated input current	17.3 A	20.8 A	24.6 A	30.5 A	14.5 A	18.6 A
No-load voltage	60 V	60 V	60 V	60 V	65 V	65 V
Output current	30-120 A	30-140 A	30-160 A	30-190 A	30-250 A	30-300 A
Rated output voltage	24.8 V	25.6 V	26.4 V	27.6 V	30 V	32 V
Current range (A)	----	----	----	----	----	----
Rated duty cycle	60%	60%	60%	60%	60%	60%
No-load loss	40 W	40 W	40 W	40 W	40 W	50 W
Efficiency	85%	85%	85%	85%	85%	85%
Power factor	0.73	0.73	0.73	0.73	0.93	0.93
Insulation grade	F	F	F	F	F	F
Housing protection grade	IP21	IP21	IP21	IP21	IP21	IP21
Weight	8 kg	8.7 kg	8.8 kg	9.2 kg	12 kg	24 kg
Dimensions (mm)	455×270×345	455×270×345	455×270×345	455×270×345	555 × 305 × 425	660 × 410 × 540



DC TOOLS

AC TOOLS

PNEUMATIC TOOLS

MEASURING TOOLS

WELDING MACHINES

GENERATORS

GARDEN TOOLS

GASOLINE GENERATOR

AF3600



Power	Single-cylinder/4-stroke/Air-cooled 170F
Displacement	208(cc)
Rated Output Voltage	230 (V~)
Rated Frequency	50(Hz)
Output Rating	2800(W)
Continuous Working Time	11(h)
Net Weight	45(kg)

GASOLINE WATER PUMP

AQGZ50



Power	Single-cylinder,4-stroke,Air-cooled
Displacement	196(cc)
Rated Power	3200(W)/3600rpm
Input/output Diameter	50(2") (mm)
Pumping Head	20(m)
Flow	20(m ³ /h)
Self-priming Height	5
Self-priming Time	≤140 (S)
Net Weight	25(kg)

GASOLINE GENERATOR

AF6500



Power	Single-cylinder/4-stroke/Air-cooled 188F
Displacement	389(cc)
Rated Output Voltage	230 (V~)
Rated Frequency	50(Hz)
Output Rating	5000(W)
Continuous Working Time	8(h)
Net Weight	73(kg)

GASOLINE WATER PUMP

AQGZ80



Power	Single-cylinder,4-stroke,Air-cooled
Displacement	208(cc)
Rated Power	4000(W) /3600rpm
Input/output Diameter	80(3") (mm)
Pumping Head	19(m)
Flow	30(m ³ /h)
Self-priming Height	5
Self-priming Time	≤160 (S)
Net Weight	30(kg)

GASOLINE GENERATOR

AF7500SE



Power	Single-cylinder/4-stroke/Air-cooled 190F
Displacement	420(cc)
Rated Output Voltage	400 (V~)
Rated Frequency	50(Hz)
Output Rating	6500(W)
Continuous Working Time	8(h)
Net Weight	82(kg)

GASOLINE GENERATOR


AF9500SE



Power	Single-cylinder/4-stroke/Air-cooled 192F
Displacement	438(cc)
Rated Output Voltage	400 (V~)
Rated Frequency	50(Hz)
Output Rating	7500(W)
Continuous Working Time	7(h)
Net Weight	85(kg)



GARDEN CLASS

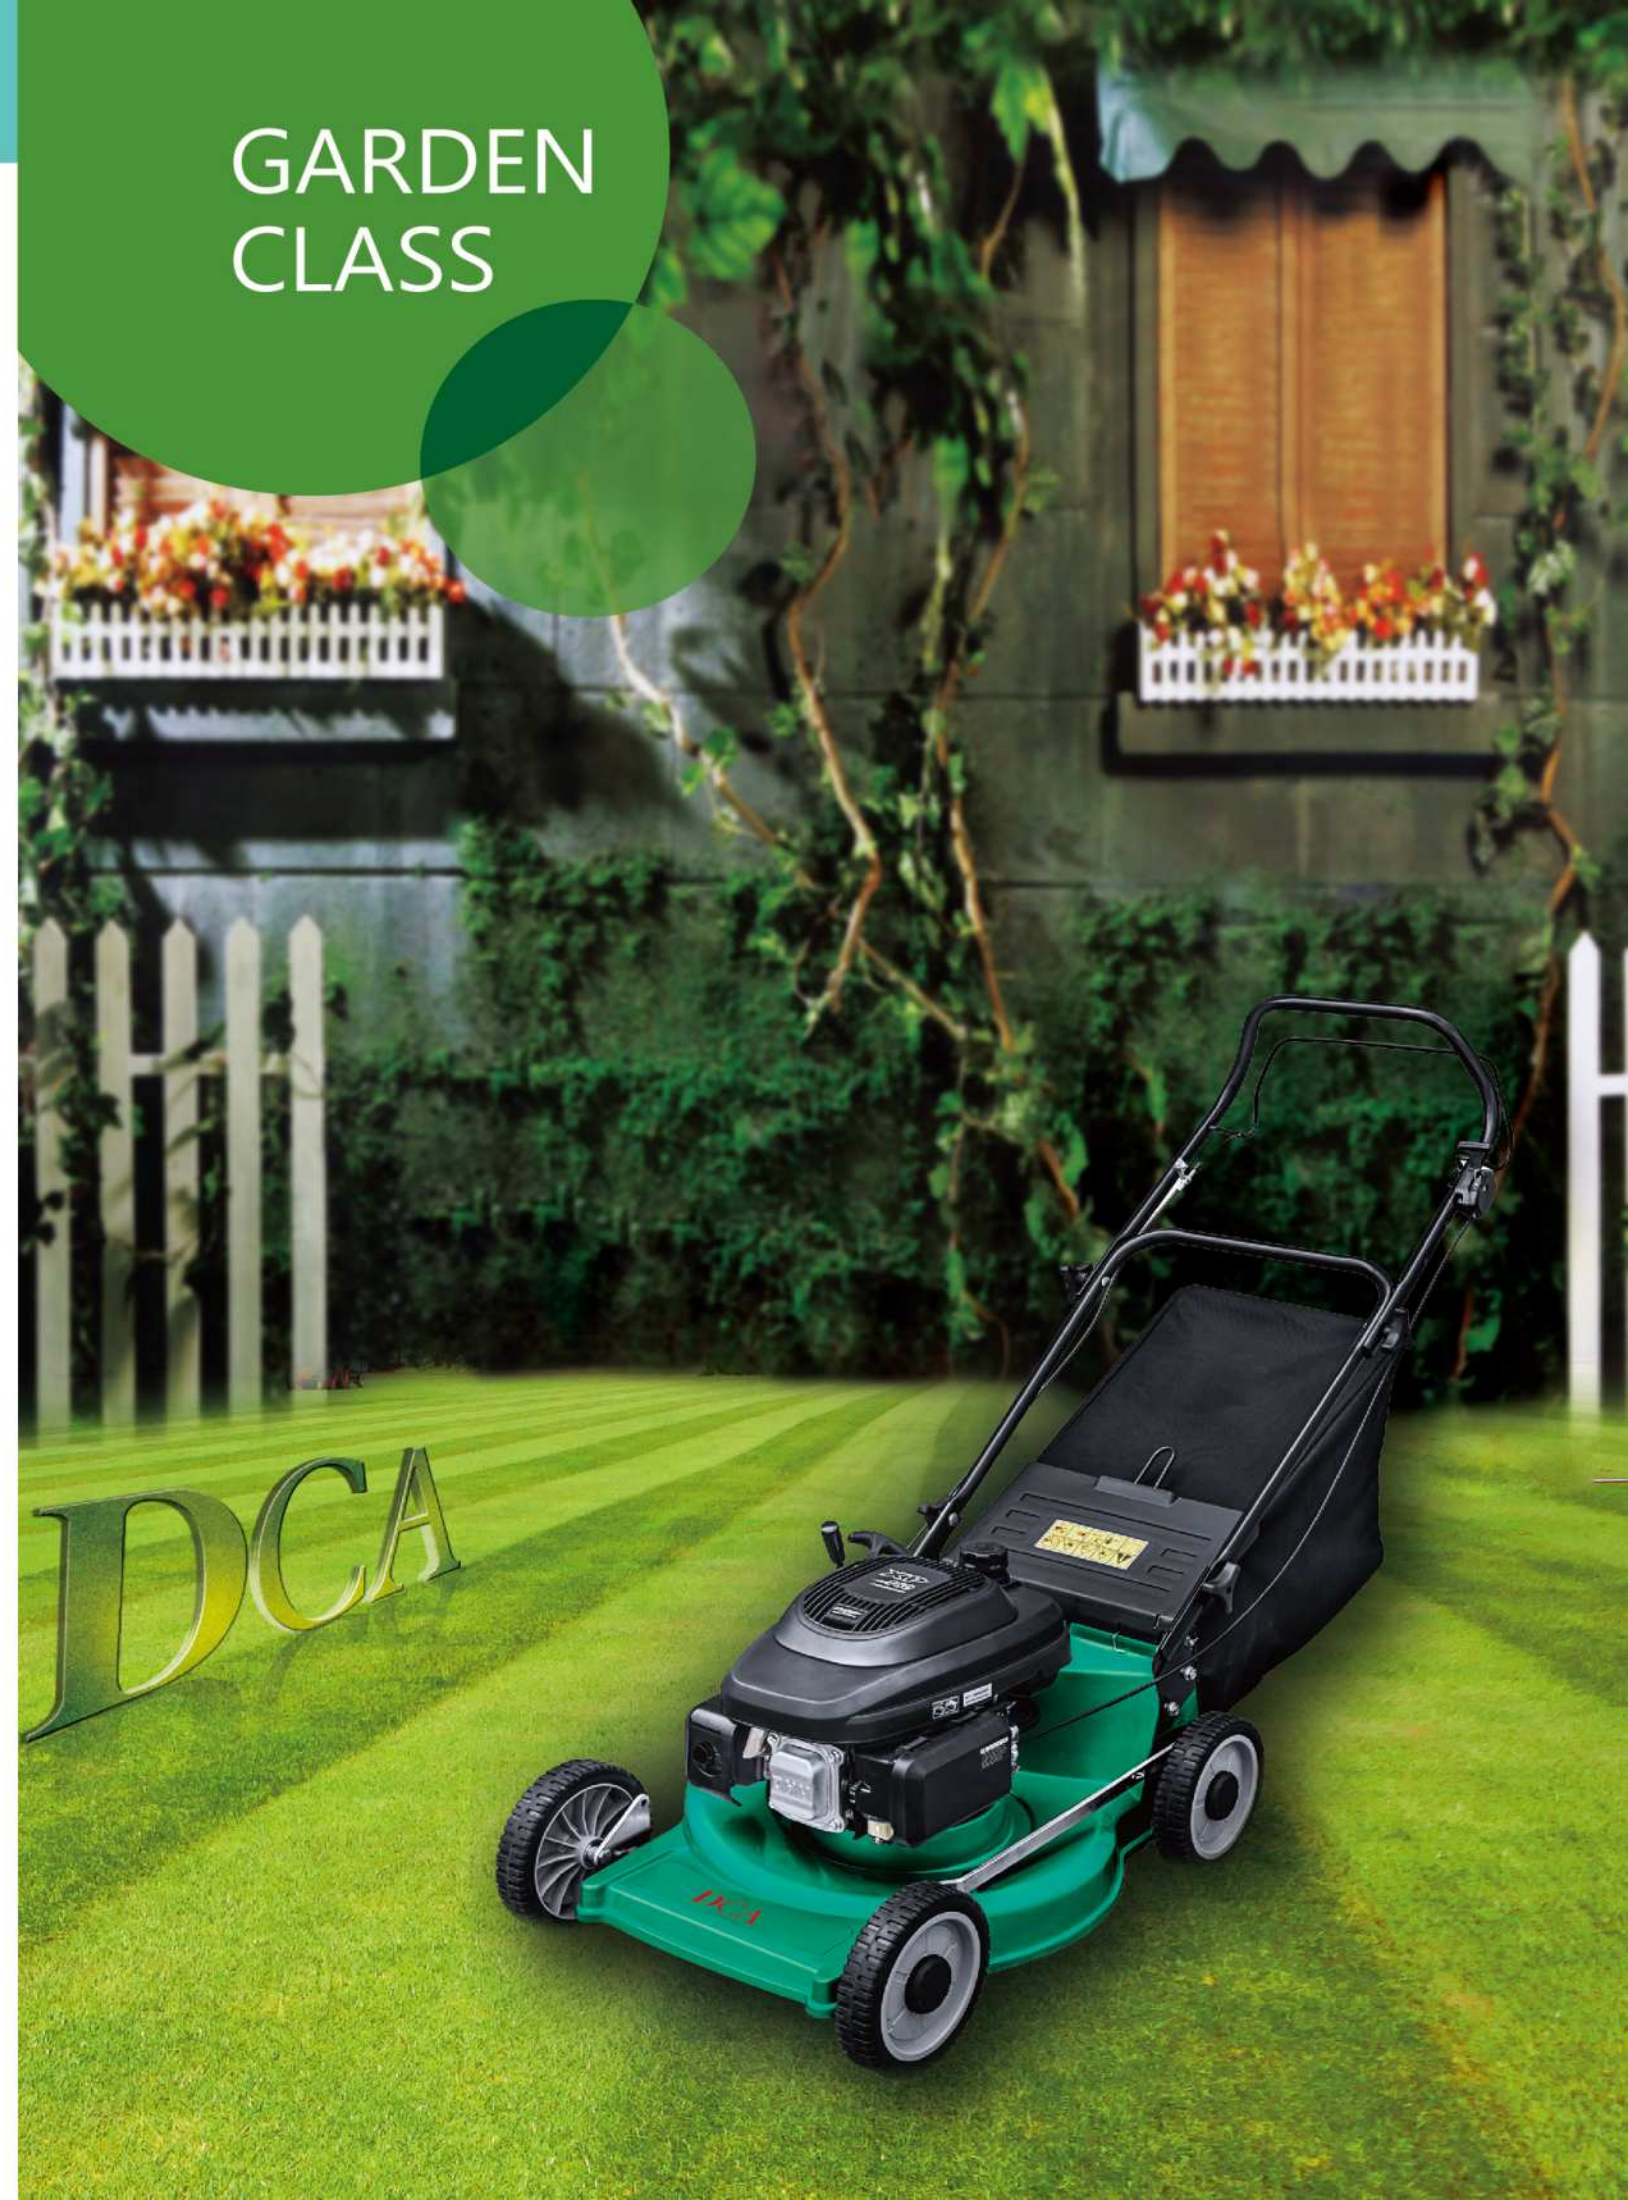

DC TOOLS

AC TOOLS

PNEUMATIC TOOLS

MEASURING TOOLS

WELDING MACHINES

GENERATORS

GARDEN TOOLS

PETROL LAWNMOWER

A03SSS48



Displacement	160(cc)
Width of Cut	480(mm)
Power(4Stroke)	XP160A (Zongshen)
Blade	Flail Knife
Max. Torque & Corresponding Speed	8.1N.m/3000(r/min)
Net Weight	33.0(kg)

PETROL CHAIN SAW

AYD54



Displacement	54 (ml)
Power Input	2200(W)
Blade Length	20"
Net Weight	5.1(kg)

PETROL LAWNMOWER

ASSS48



Displacement	160(cc)
Width of Cut	480(mm)
Power(4-Stroke)	XP160A (Zongshen)
Blade	Flail Knife
Max. Torque & Corresponding Speed	8.1N.m/3000(r/min)
Net Weight	33.0(kg)

- Die-casting highly-intensive aluminum base ensures durable use of this machine
- 7-step adjustable cutting height

PETROL HEDGE TRIMMER

A02GJB0.7KW



Displacement	22.5(cc)
Width of Cut	600 (mm)
Power(2-Stroke)	1E32FL-S
Blade Type	Double-edge Tooth
Power Input	0.7KW/7500r/min
Net Weight	6(kg)

- Double-edged blade
- Rotatable handle ensures operating with either left or right hand

PETROL CHAIN SAW

AYD40



Displacement	39.6 (ml)
Power Input	1500(W)
Blade Length	16"
Net Weight	4.3(kg)

PETROL BRUSH CUTTER

ABG431



Displacement	31(cc)
Cutting Dia.	415 (mm)
Blade Dia.	255(mm)
Power(4-Stroke)	139F
Power Input	0.7KW/6500r/min
Net Weight	11 (kg)

- 360°rotatable and vibration-reduction handle
- Highly-intensive safety guard ensures safe operation

PETROL BRUSH CUTTER

ACXB1.25KW



Displacement	42.7(cc)
Cutting Dia.	415 (mm)
Blade Dia.	255(mm)
Power(2-Stroke)	1E40F-50D
Power Input	1.25KW/7000r/min
Net Weight	7.9 (kg)

- 360°rotatable and vibration-reduction handle
- Highly-intensive safety guard ensures safe operation



DC TOOLS

AC TOOLS

PNEUMATIC TOOLS

MEASURING TOOLS

WELDING MACHINES

GENERATORS

GARDEN TOOLS

